Part No: PCA9001



ALKALINE BATTERY NX-POWER PLUS

PILE ALCALINE NX-POWER PLUS


MAIN INFORMATION / INFORMATIONS GÉNÉRALES

SIZE	FORMAT	LR03 - AAA			
BRAND	MARQUE	NX			
TECHNOLOGY	TECHNOLOGIE	Alkaline / Alcaline			
CHEMICAL SYSTEM	SYSTÈME CHIMIQUE	Zn/Mn02			
VOLTAGE	TENSION	1.5V			
CAPACITY	CAPACITÉ	1460 mAh			
WEIGHT	POIDS	11.5 Gr.			
SHELF LIFE*	DURÉE DE VIE*	10 years/10 ans			
OPERATING TEMPERATURE RANGE	TEMPÉRATURE D'UTILISATION	-18°C to +50°C			
STORAGE TEMPERATURE RANGE	TEMPÉRATURE DE STOCKAGE	10°C to +25°C			
TERMINALS	SORTIE	Flat/Plot pile			
PACKING CONDITIONNEMENT		Box of 10/ Boîte de 10			

*In consideration of typical loss of capacity at storage. *Dans les conditions normales de stockage. Individually packed by 2 for easy dispatch and to protect against humidity and short circuit. Les piles sont emballées par 2 dans un film plastique pour les protéger de l'humidité.

DIMENSIONS / DIMENSIONS					
A	43.8 to 44.5mm				
Ø	9.9 to 10.4mm				
C	4.3mm				
F	3.8mm				
G	0.8mm				







Shrink x2	(c),200(course)	
Transformer		

ELECTRICAL CHARACTERISTICS

LOAD	20 Ω	600mA	600mA	5.1 Ω	5.1 Ω	100mA	24Ω	75 Ω	50mA
TEST MODE	24h/d	24h/d	10s/m/1h/d	1h/d	4m/h,8h/d	1h/d	15s/m/ 8h/d	4h/d	1h/12h/ 24h/d
END VOLTAGE	0.9V	0.9V	0.9V	0.8V	0.9V	0.9V	1.0V	0.9V	0.9V
UNIT	h	m	pulse	m	m	h	h	h	h
APPLICATIONS	REFERENCE	REFERENCE	PHOTO FLASH	тоү	Portable Lighting	digital Audio	REMOTE CONTROL	RADIO/ Clock	digital Audio
Normal Duration	18.5	40	380	260	240	9.8	20.7	75	22

m: minute h: hour d:day


www.enix-energies.com • Date: 2023/10/13

| 1/1

OUTLINE SAFETY WARNING: USE ONLY WITH IN THE ALLOWED PARAMETERS. Do not short circuit or over-load the battery. Charge only using an approved charger designed specifically to charge this battery. Do not heat above maximum temperatures indicated. Never crush, mutilate, puncture or abuse the battery. Do not dismantle the pack or disable any of the protective devices or circuits. DO NOT USE THE BATTERY IF YOU SUSPECT IT MAY BE FAULTY OR DAMAGED.

© Copyright Enix Energies 2005. NB: This document and the product design are the intellectual property of Enix Energies. No document or design may be copied or used for commercial purposes without written permission of Enix Energies. Users must satisfy themselves, by means of testing etc, that products are suitable for their application. Data in this document is for general guidance only; consult cell manufacturers data for definitive information. Information is given free of charge and in good faith, but no responsibility can be accepted for any errors or omission or costs or losses or liabilities arising from the use of this information. All business is conducted to Enix Energies terms and conditions only.

DISCHARGE DIAGRAM / COURBES DE DÉCHARGE

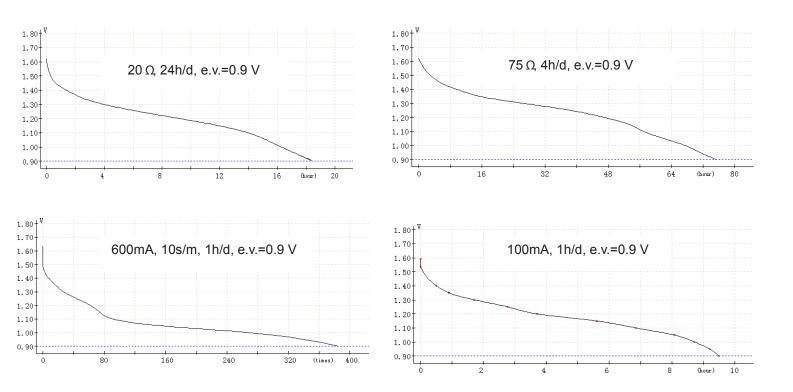

www.enix-energies.com • Date: 2023/10/13

| 2/2

OUTLINE SAFETY WARNING: USE ONLY WITHIN THE ALLOWED PARAMETERS. Do not short circuit or over-load the battery. Charge only using an approved charger designed specifically to charge this battery. Do not heat above maximum temperatures indicated. Never crush, mutilate, puncture or abuse the battery. Do not dismantle the pack or disable any of the protective devices or circuits. DO NOT USE THE BATTERY IF YOU SUSPECT IT MAY BE FAULTY OR DAMAGED.

© Copyright Enix Energies 2005. NB: This document and the product design are the intellectual property of Enix Energies. No document or design may be copied or used for commercial purposes without written permission of Enix Energies. Users must satisfy themselves, by means of testing etc., that products are suitable for their application. Data in this document is for general guidance only; consult cell manufacturers data for definitive information. Information is given free of charge and in good faith, but no responsibility can be accepted for any errors or omission or costs or losses or liabilities arising from the use of this information. All business is conducted to Enix Energies terms and conditions only.