

## OPEN LEAD BATTERY 12V-65Ah

NX POWER DEEP CYCLE





## MAIN INFORMATION / INFORMATIONS GÉNÉRALES

BRAND / MARQUE	NX
TECHNOLOGY / TECHNOLOGIE	Open Lead Battery
NOMINAL VOLTAGE / TENSION NOMINALE	12V
NOMINAL CAPACITY / CAPACITÉ NOMINALE	65Ah (100hr)
DIMENSIONS / DIMENSIONS	
• Length / Longueur	242 mm
• Width / Largeur	175 mm
• Height / Hauteur	190 mm
WEIGHT / POIDS	
Acid included / Avec acide	17.68 kg
• Without acid / Sans acid	13.67 kg
POLARITY / POLARITÉ	- +
TERMINAL / TYPE DE COSSES	Auto
CASING / TYPE DE BAC	L2
COLOR / COULEUR DE BAC	Black top and white case



## TECHNICAL INFORMATION / INFORMATIONS TECHNIQUES

CAPACITY / CAPACITÉ		
	• 65Ah C <sub>100</sub>	
	• 60Ah C <sub>20</sub>	
	• 45Ah C <sub>5</sub>	
GRIDS TECHNOLOGY / COMPOSITION DES GRILLES	Pb - Sb - Se	
CYCLING / CYCLAGE		
	300 cycles acc. to Standard DIN 43 539 part 3 600 cycles acc. to Standard DIN 40 757	
	1200 cycles acc. to Standard DIN 40 767	

## **APPLICATIONS / APPLICATIONS**

Leisure (nautical, caravan, camper...) / Loisir (marine, caravane..)

Electric traction ( fork lift trucks and electric pallet trucks) / Semi traction ( charriots élévateurs, transpalettes...)

Industrial cleaning machines / Engins de nettoyage

Electric vehicles / Véhicules électriques

Lifting apparatus / Engins de levage

Lighting and solar / Energie solaire




www.enix-energies.com • Date : 25-07-2014 • Rev.No : A1

| 1/2

OUTLINESAFETYWARNING:USEONLYWITHINTHEALLOWEDPARAMETERS.Donotshortcircuitorover-loadthebattery.Chargeonlyusinganapprovedchargerdesignedspecificallytochargethisbattery.Donotheatabovemaximumtemperatures indicated.Nevercrush,mutilate,punctureorabusethebattery Do not dismantle the pack or disable any of the protective devices or circuits. DO NOT USE THE BATTERY IF YOU SUSPECT IT MAY BE FAULTY OR DAMAGED.

© Copyright Enix Energies 2005. NB: This document and the product design are the intellectual property of Enix Energies. No document or design may be copied or used for commercial purposes without written permission of Enix Energies. Users must satisfy themselves, by means of testing etc., that products are suitable for their application. Data in this document is for general guidance only; consult cell manufacturers data for definitive information. Information is given free of charge and in good faith, but no responsibility can be accepted for any errors or omission or costs or losses or liabilities arising from the use of this information. All business is conducted to Enix Energies terms and conditions only.

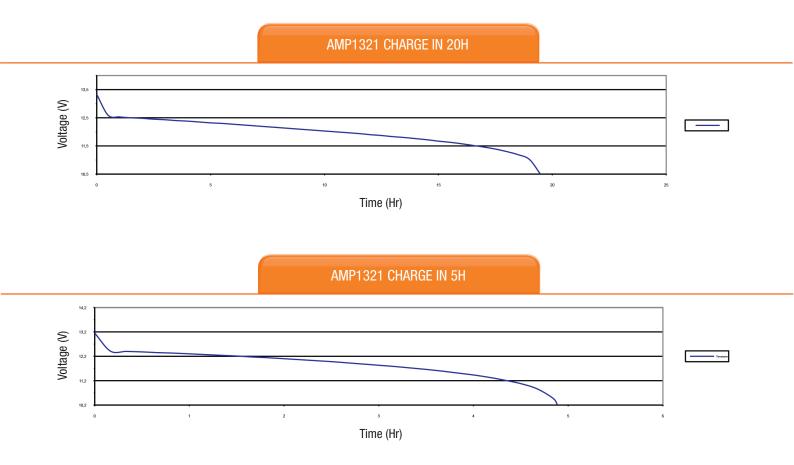

www.enix-energies.com • Date : 25-07-2014 • Rev.No : A1

| 2/2

OUTLINESAFETYWARNING:USEONLLWITHINTHEALLOWEDPARAMETERS.Donotshortcircuitorover-loadthebattery.Chargeonlyusinganapprovedchargerdesignedspecificallytochargethisbattery.Donotheatabovemaximumtemperatures indicated.Nevercrush,mutilate,punctureorabusethebattery. Do not dismantle the pack or disable any of the protective devices or circuits. DO NOT USE THE BATTERY IF YOU SUSPECT IT MAY BE FAULTY OR DAMAGED.

© Copyright Enix Energies 2005. NB: This document and the product design are the intellectual property of Enix Energies. No document or design may be copied or used for commercial purposes without written permission of Enix Energies. Users must satisfy themselves, by means of testing etc, that products are suitable for their application. Data in this document is for general guidance only; consult cell manufacturers data for definitive information. Information is given free of charge and in good faith, but no responsibility can be accepted for any errors or omission or costs or losses or liabilities arising from the use of this information. All business is conducted to Enix Energies terms and conditions only.